

LEVER HOIST

NOVA PLUS



0.75t to 3t

Zinc-plated load chain

Overload protection included

Complies with ASME B30.21



ROBUST

- Heavy-duty design and construction
- Additional load bearing plate for increased strength
- Alloy steel hook with cast safety latch for increased wear resistance
- Highly resistant one-piece friction disc and ratchet
- Zinc-plated load chain, chain guide and side plates for improved corrosion resistance.

HANDY

- Hook attachment point for easy transportation
- Compact, ergonomic handle ideal for confined spaces
- Ergonomic forged end ring.

SAFE

- Incorporates a free running mechanism that ensures secure load handling without unintentional release
- Heat treated, electro welded alloy steel load chain for superior strength and wear resistance
- Overload limiter designed to protect both the user and the equipment.



**ZINC-PLATED
CHAIN GUIDE
& SIDE PLATES**



**FREE
RUNNING
SYSTEM**



**CAST
SAFETY
LATCH**




**ERGONOMIC
FORGED
END RING**

LEVER HOIST

NOVA PLUS



TECHNICAL SPECIFICATIONS

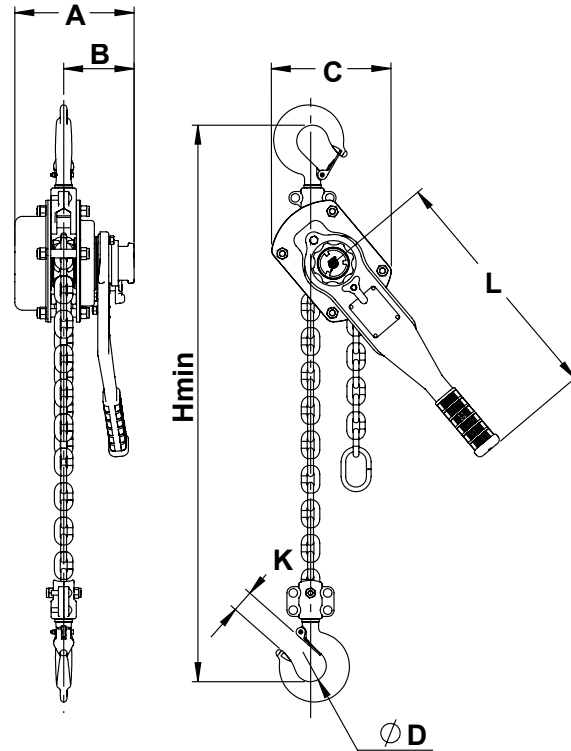

Capacity, t [lb]	Force to lift max load, kg [lbf]	Load chain ø x pitch, mm [in]	Net weight*, kg [lb]	Extra weight/lift, kg/m [lb/ft]	Dimensions, mm [in]						
					A	B	C	H min	L	K**	D
0.75 [1763]	15 [33.1]	6 x 18 [0.236 x 0.709]	7.1 [15.6]	0.8 [0.54]	160 [6.30]	100 [3.94]	133 [5.24]	320 [12.6]	250 [9.84]	26 [1.024]	40 [1.575]
1.5 [3306]	30 [66.1]	8 x 24 [0.315 x 0.945]	10.8 [23.8]	1.4 [0.94]	182 [7.17]	109 [4.29]	157 [6.18]	380 [14.96]	270 [10.3]	29 [1.142]	45 [1.772]
3.0 [6613]	31 [68.3]	10 x 30 [0.394 x 1.181]	23.3 [51.4]	2.2 [1.48]	208 [8.17]	122 [4.80]	210 [8.27]	490 [19.29]	430 [16.93]	39 [1.535]	55 [2.165]

*For a ratchet puller with 5' of lift or pull distance.

**Here, K takes the safety latch into account.